

耐克斯
NaiKesi

源自德国技术

科技缔造 分毫精度

上得利电子仪器有限公司
SHANGDELI ELECTRONIC INSTRUMENT CO.,LTD

全国统一免费客服热线: 400-663-1388

地址: 中国福建省莆田市秀屿区上塘珠宝工业园

ADD: Shangtang Jewellery Industry District, Xiuyu District, Putian City, Fujian China

电话: 0594-5639888 5271388 传真: 0594-6950309

TEL: 86-594-6950366 FAX: 86-594-6950309

http://www.naikesi.com.cn E-mail: naikesi@qq.com

Wechat: Naikesi988



耐克斯
NaiKesi

源自德国技术



高性能工业用衡器品牌

Leading Brand of Industrial Weighing Instruments In China

上得利电子仪器有限公司
SHANGDELI ELECTRONIC INSTRUMENT CO.,LTD

实力 让我们引领行业

Use of the creative thinking and advanced technology, innovation, and improve service levels



14年前，一群年轻、充满激情、求精务实的上得利人选择进入了一个全新的行业——电子衡器。多年来，他们众志成城，不懈努力，从零开始发展到规模化的生产，从默默无闻到赢得了众多客户的支持和信赖，他们经受了巨大的市场考验，用真诚与辛勤换来了经验教训与稳步的发展。如今的上得利人已以卓越的品质立足于中国，放眼世界……

2003年：组织研发团队，用传统的双积分电路原理开发了第一款主要用于珠宝首饰行业的电子衡器——NS系列电子天平。

2004年：开始建设计价秤生产流水线，因经验不足和产品设计缺陷使企业陷入了困境。

2005年：总结经验，吸取国内外同行产品的优点，引进了先进的Σ-Δ高精度模数转换技术并对产品进行了整改。全新的设计理念，专业的管理经验，使产品得到了同行的初步认可。

2006年：公司进入大规模的新品开发生产阶段，由于吸取了以前的经验和教训，所生产的高品质产品迅速打开了国内市场，并进入了东南亚等国外市场。

2007年：引进全套的EMC测试仪器和环境试验设备，部分产品已开始申请OIML欧盟证书。

2008年：系列产品已批量进入俄罗斯、西班牙、马来西亚、捷克、新西兰、阿根廷、新加坡等国外市场，品质得到进一步的肯定。

2009年：在全球面临金融危机危机的情况下，公司经过全面整顿和创新，使年产值突破了5000万，同时征地20亩用于新厂房的投建规划。

2010年：第一栋5200平方米的新厂房投入生产，先后建立了注塑车间和全自动PCB贴片车间，同时开始研发收银秤、条码秤和自动化称重设备，公司的竞争力得到进一步提高。

2011年：引进德国马丁公司技术和设计理念，我司自主研发收银秤和条码秤，并在产品设计上融入自主特色。首家独创拼音输入法，解决传统的采用汉字编码编辑信息方式。

2012-2013年：产品逐渐投入市场进行小批量测试，根据市场需求以及客户对产品的反馈不断更新改良，制定了一套满足不同层次消费者的产品方案，产品具有操作简单、易学、实现10分钟轻松掌握产品使用方法的特点，并可以完全脱离PC进行各项编辑。

2014年：经过两年的市场验证磨合，产品不断改善，品质逐渐稳定。荣获省级科技创新奖，同时通过了OIML、CE、CMC等认证。

2015年：产品全面推广，销售量以每月20%的速度递增，同时投建一条年产量20万台的收银、条码秤半自动化生产线，部分产品远销俄罗斯、英国、乌克兰、印度等国家，深受消费者的好评与信赖。

2016年：不断创新，超越自我，立足全球。力求做最好的产品，摆脱消费者对中国制造的偏见。

2017年：农贸O2O电商平台研发成功并上线。

2019年：秉承诚信、务实、创新的经营理念，生产一流的产品、成就一流企业。

- COMPANY DIRECTORY
公司目录
- 4 DS系列电子天平
 - 5 LS系列电子天平
 - 7 MR系列电子天平
 - 8 DSC系列电子计数天平
 - 9 TDP-A电子计重仪表
 - 10 WH系列电子计重秤
 - 11 ZNS系列电子计重秤
 - 12 ZAM系列高精度电子计重秤
 - 13 CH系列电子计数秤
 - 14 CNS系列电子计数秤
 - 15 CAM系列电子计数秤
 - 16 JNS系列电子计价秤
 - 17 ACS系列电子计价秤
 - 18 ACS-L立杆电子计价秤
 - 19 NDC/TC-304计数重打印秤
 - 20 TEM系列电子计重仪表
 - 20 TCM系列电子计重仪表
 - 20 TAM系列电子计价仪表
 - 21 TWH系列电子计重台秤
 - 22 TCH系列电子计数台秤
 - 23 TAS系列电子计价台秤

DS Series DS系列电子天平

DS Series Electronic Balance

| Model | DS-100A | DS-150A | DS-200A | DS-300A |
|------------|--|---------|-------------|---------|
| Capacity | 100g | 150g | 200g | 300g |
| Resolution | 0.001g | 0.005g | 0.001g | 0.001g |
| Voltage | AC220V <small>\\ktdoc\临时文件\发送\核对稿\KT00012008170037-28V</small> | | | |
| Display | 109mm x 30mm | | LCD Display | |
| Scale Size | Φ83mm | | | |



功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 60 万内码精度 → 6 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调节功能 → optional reaction speed
- 无背光和自动背光可调功能
→ you can select non-backlight or auto-backlight by yourself
- 内置蓄电池 → equipped with rechargeable battery
- 可选配 RS232 打印接口
→ equipped with the RS232 print interface when you need.

| Model | DS-200B | DS-300B | DS-600B | DS-1000B | DS-1500B | DS-2000B | DS-2000C | DS-3000B | DS-500H | DS-1000H | DS-2000H | DS-3000H | DS-5000H | DS-6000H |
|------------|--------------|---------|---------|----------|-------------|----------|----------|----------|---------|----------|----------|----------|----------|----------|
| Capacity | 200g | 300g | 600g | 1000g | 1500g | 2000g | 2000g | 3000g | 500g | 1000g | 2000g | 3000g | 5000g | 6000g |
| Resolution | 0.01g | 0.01g | 0.01g | 0.01g | 0.05g | 0.01g | 0.02g | 0.01g | 0.1g | 0.1g | 0.1g | 0.1g | 0.05g | 0.1g |
| Voltage | AC220V | | | | DC8V | | | | | | | | | |
| Display | 109mm x 30mm | | | | LCD Display | | | | | | | | | |
| Scale Size | Φ140mm | | | | | | | | | | | | | |

LS Series LS系列电子天平

LS Series Electronic Balance



功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 60 万内码精度 → 6 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调节功能 → optional reaction speed
- 无背光和自动背光可调功能
→ you can select non-backlight or auto-backlight by yourself
- 内置蓄电池 → equipped with rechargeable battery
- 可选配 RS232 打印接口
→ equipped with the RS232 print interface when you need

| Model | LS100A | LS200A | LS200 | LS300 | LS500 | LS600 | LS1000 | LS1200 | LS1500 |
|-------------|--------------------------|--------|-------|-------|-------|-------|--------|--------|--------|
| Capacity | 100g | 200g | 200g | 300g | 500g | 600g | 1000g | 1200g | 1500g |
| Resolution | 0.001g | 0.005g | 0.01g | 0.01g | 0.01g | 0.01g | 0.01g | 0.01g | 0.05g |
| Voltage | AC220V | | | | DC9V | | | | |
| Display | 110mm x 27mm LCD Display | | | | | | | | |
| Scale Size | 117 x 140mm Φ140mm | | | | | | | | |
| Packing Box | 340 x 240 x 125mm | | | | | | | | |

LS Series LS系列电子天平

LS Series Electronic Balance

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 60 万内码精度 → 6 hundred thousand ISN precision
- 多种单位选择 → manifold units.
- 随意砝码校正 → calibrate at will.
- 简易计数功能 → simple counting.
- 过载保护功能 → self-protection as over loading.
- 反应速度可调节功能 → optional reaction speed.
- 无背光和自动背光可调功能
- you can select non-backlight or auto-backlight by yourself.
- 内置蓄电池 → equipped with rechargeable battery.
- 可选配 RS232 打印接口
- equipped with the RS232 print interface when you need.



| Model | LS200H | LS500H | LS1000H | LS2000H | LS3000H | LS5000H | LS6000H | LS2000A | LS3000A |
|-------------|-------------------|--------|---------|---------|---------|---------|---------|---------|---------|
| Capacity | 200g | 500g | 1000g | 2000g | 3000g | 5000g | 6000g | 2000g | 3000g |
| Resolution | 0.1g | 0.1g | 0.1g | 0.1g | 0.1g | 0.1g | 0.1g | 0.05g | 0.05g |
| Voltage | AC220V | | | | DC9V | | | | |
| Display | LCD Display | | | | | | | | |
| Scale Size | 143 × 170mm | | | | | | | | |
| Packing Box | 340 × 240 × 125mm | | | | | | | | |

MR 系列电子天平

MR Series Electronic Balance

功能参数 /FUNCTION SUMMARY

- 铝合金机壳 → Aluminum alloy shell
- 高精度称重传感器 → High-precision load cell
- 超大 LCD 显示器 → Super LCD in the indicator
- 双量程模式 → Dual division mode
- 自动温度补偿 → Automatic temperature compensation
- 百分比称重 → With the percentage of weighing
- 几十种单位选择、锁定功能
- You can select and lock one of dozens of units
- 简易计数功能 → Simple counting function
- 上下限报警功能 → The maximum and minmum limit alarm function
- 内置蓄电池 → Built-in battery
- 可选择动物 (动态) 称重功能
- You can select Animal(dynamic condition) weighing function when you need
- 可选配上下限报警节点输出
- Optional maximum and minimum limit alarm node output
- 可选配下挂钩称量节点装置 → Optional the lower hook equipment
- 可选配 RS232/USB 接口 → Optional RS232/USB interface
- 可选配蓝牙通讯 → Optional blue tooth communication
- 可选配外接显示器 → Optional external indicator



| Model | MR-60A | MR-100A | MR-200A | MR-300A | MR-200B | MR-300B | MR-600B | MR-1000B | MR-2000B | MR-3000B |
|------------|--------------------------|---------------|---------------|---------|--------------------------|------------|------------|---------------|-------------|-------------|
| Capacity | 60g/300g | 100g/300g | 200g/300g | 300g | 200g/600g | 300g/600g | 600g/1000g | 1000g/2000g | 2000g/3000g | 3000g/4500g |
| Resolution | 0.001g/0.005g | 0.001g/0.005g | 0.001g/0.005g | 0.001g | 0.01/0.05g | 0.01/0.05g | 0.01/0.05g | 0.01/0.05g | 0.01/0.05g | 0.01/0.05g |
| Voltage | AC220V | | | DC12V | | AC220V | | DC12V | | |
| Display | 120mm × 40mm LCD Display | | | | 120mm × 40mm LCD Display | | | | | |
| Scale Size | Φ83mm | | | | Φ140mm | | | 170mm × 173mm | | |

DSC Series DSC 系列电子计数天平

DSC Series Electronic Counting Balance

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 100 万内码精度 → 1 million ISN precision
- 可分辨 0.3d 单重 → resolution limit is 0.3d
- 多种单位选择 → manifold units
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 动态检测和零点跟踪功能
- dynamic detection and optional zero tracking
- 预扣重量和预设上下限报警功能
- preset the upper and lower limit alarm and the known tare
- 可选配外接定量（上下限）报警灯或自动化称重设备功能
- Optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment



| Model | DSC-100A | DSC-200A | DSC-300A | DSC-300B | DSC-600B | DSC-1200B | DSC-2000B | DSC-3000B |
|------------|--------------|----------|----------|----------|---------------|-----------|-----------|-----------|
| Capacity | 100g | 200g | 300g | 300g | 600g | 1200g | 2000g | 3000g |
| Resolution | 0.001g | 0.001g | 0.001g | 0.01g | 0.01g | 0.01g | 0.01g | 0.01g |
| Voltage | AC220V | | | | DC8V | | | |
| Display | 109mm × 30mm | | | | LCD Display | | | |
| Scale Size | Φ83mm | | Φ140mm | | 170mm × 173mm | | | |


TDP Series TDP-A 电子计重仪表

TDP-A Electronic Weighing Indicator

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器
- 24 bit A/D converter
- 15000-60000 显示分辨率
- 15000-60000 display resolution
- 多种单位选择
- manifold units
- 重量上、下限报警，可外接报警灯
- upper and lower limit alarm, external connection alarm light
- 重量超载报警
- overload alarm
- 重量累计功能
- weight accumulation function
- 无背光、自动背光可调功能
- you can select non-backlight or auto-backlight by yourself
- 缺电电瓶自我保护功能
- self-protection as power shortage
- 简易计数功能，可选动物称重功能
- simple counting, optional animal weighing function
- 错误信息提示功能
- wrong message indicating
- 外部校正功能
- calibration outside
- 零点跟踪可调功能
- optional zero tracking
- 动态检测范围可调功能
- dynamic detection range adjustable
- 均值滤波可调功能
- multistage filter settable
- 随意砝码校正
- calibrate at will
- 可选调 RS232 输出及 Relay 输出
- equipped with RS232 and Relay output when you need
- 数码显示 (LED) 充一次电正常可使用 30 天
- LED model will stand 240 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 60 天
- LCD model will stand 480 hours once on the normal operation condition



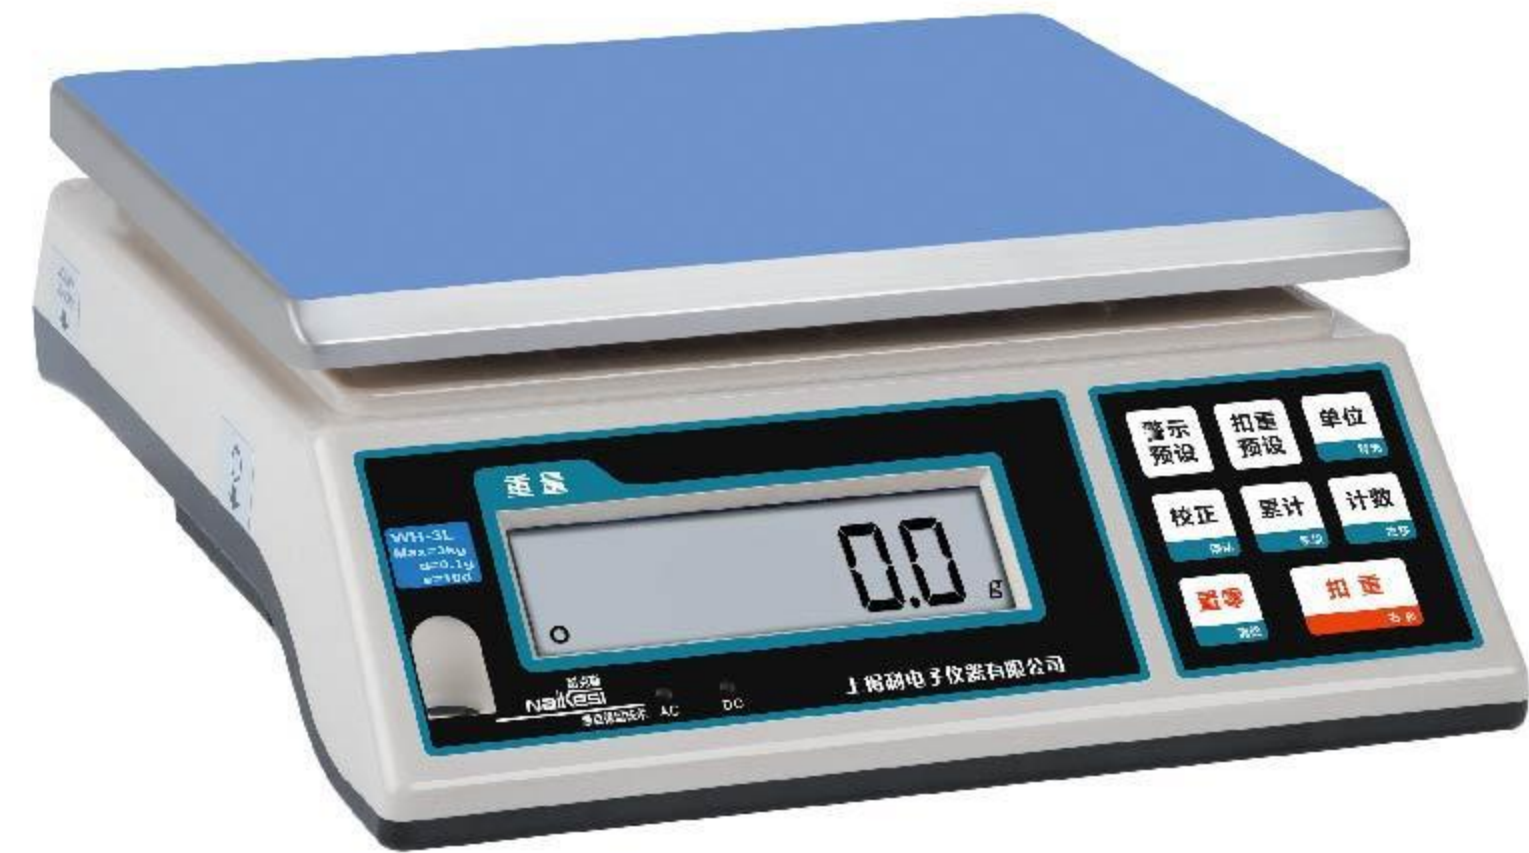


WH Series WH系列电子计重秤

WH Series Weighing E-scale

功能参数 /FUNCTION SUMMARY

- 21 位 A/D 转换器 → 21 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 20 万内码精度 → 2 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare

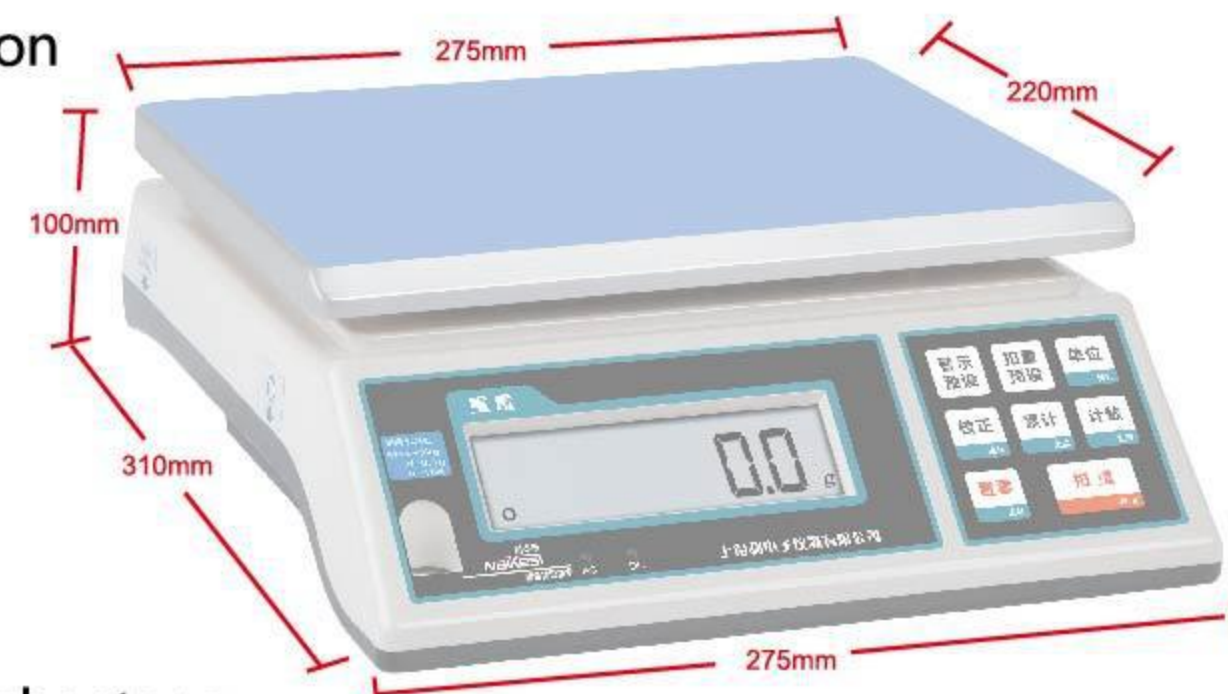

| Model | WH-1.5L | WH-3L | WH-6L | WH-7.5L | WH-15L | WH-30L |
|-------------|-------------------|-------|---------|---------|--------|--------|
| Capacity | 1.5kg | 3kg | 6kg | 7.5kg | 15kg | 30kg |
| Resolution | 0.1g | 0.2g | 0.2g | 0.5g | 1g | 2g |
| Display | LED/LCD Display | | | | | |
| Voltage | AC220V | | DC6V4AH | | | |
| Packing Box | 350 × 320 × 140mm | | | | | |

ZNS Series ZNS系列电子计重秤

ZNS Series Weighing E-scale



功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 30 万内码精度 → 3 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare
- 可选配外接定量（上下限）报警灯或自动化称重设备功能 → optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment



| Model | ZNS-1.5H | ZNS-3H | ZNS-6H | ZNS-15H | ZNS-30H |
|-------------|-------------------|--------|---------|---------|---------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.05g | 0.1g | 0.2g | 0.5g | 1g |
| Display | LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 370 × 330 × 140mm | | | | |



ZAM Series ZAM系列高精度电子计重秤

ZAM Series Weighing E-scale

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 60 万内码精度 → 6 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 动态检测和零点跟踪可调功能 → dynamic detection and optional zero tracking
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare
- 可选配 RS232 打印接口 → equipped with the RS232 print interface when you need
- 可选配外接定量 (上下限) 报警灯或自动化称重设备功能
→ optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment



| Model | ZAM-1.5A | ZAM-3A | ZAM-6A | ZAM-15A | ZAM-30A |
|-------------|-------------------|------------|----------|----------|---------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.02/0.05g | 0.05g/0.1g | 0.1/0.2g | 0.2/0.5g | 0.5/1g |
| Display | LED/LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 360 × 380 × 140mm | | | | |




CH Series CH系列电子计数秤

CH Series Counting E-scale

功能参数 /FUNCTION SUMMARY

- 21 位 A/D 转换器 → 21 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 20 万内码精度 → 2 hundred thousand ISN precision
- 可分辨 0.5d 单重 → resolution limit is 0.5d
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 动态检测和零点跟踪可调功能 → dynamic detection and optional zero tracking
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare

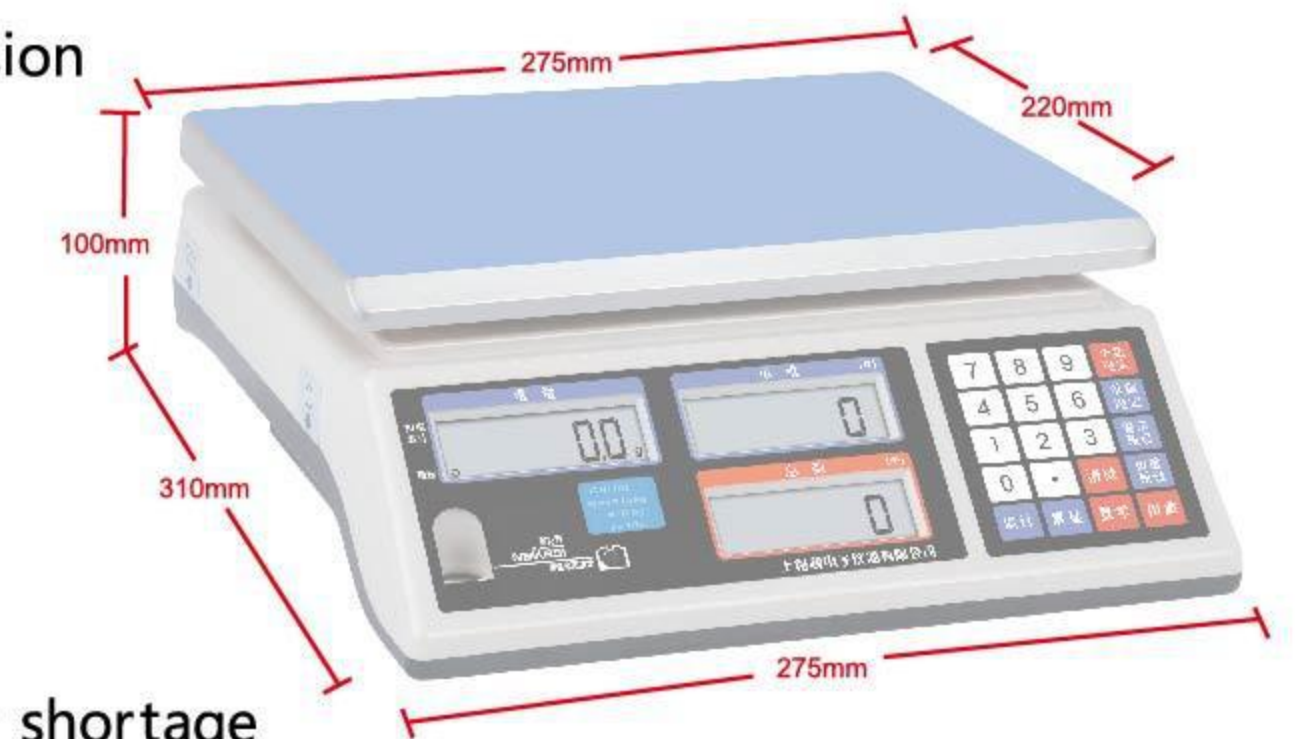

| Model | CH-1.5L | CH-3L | CH-6L | CH-15L | CH-30L |
|-------------|-------------------|-------|---------|--------|--------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.1g | 0.2g | 0.2g | 1g | 2g |
| Display | LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 350 × 320 × 140mm | | | | |




CNS Series CNS系列电子计数秤

CNS Series Counting E-scale

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 30 万内码精度 → 3 hundred thousand ISN precision
- 可分辨 0.3d 单重 → resolution limit is 0.3d
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare
- 动态检测和零点跟踪可调功能 → dynamic detection and optional zero tracking
- 可选配外接定量 (上下限) 报警灯或自动化称重设备功能
→ optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment

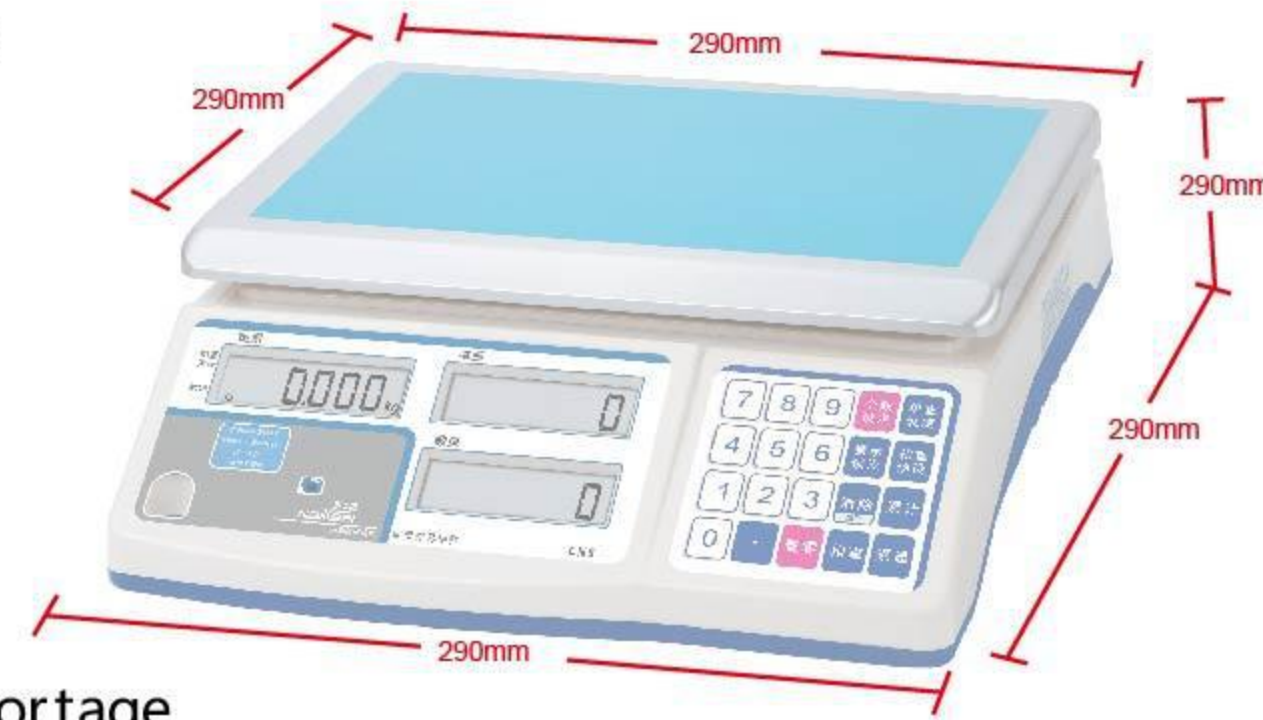

| Model | CNS-1.5A | CNS-3H | CNS-6H | CNS-15A | CNS-30H |
|-------------|-----------------------|--------|---------|---------|---------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.05g | 0.1g | 0.2g | 0.5g | 1g |
| Display | LCD Display Backlight | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 370 × 330 × 140mm | | | | |



CAM Series CAM系列电子计数秤

CAM Series Counting E-scale

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 60 万内码精度 → 6 hundred thousand ISN precision
- 可分辨 0.2d 单重 → resolution limit is 0.2d
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 过载保护功能 → self-protection as over loading
- 反应速度可调功能 → optional reaction speed
- 自动再平均功能 → Automatic average the unit weight in the course of counting
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 动态检测和零点跟踪可调功能 → dynamic detection and optional zero tracking
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare
→ 可选配 RS232 打印接口 → equipped with the RS232 print interface when you need
- 可选配外接定量 (上下限) 报警灯或自动化称重设备功能
→ optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment

| Model | CAM-1.5A | CAM-3A | CAM-6A | CAM-15A | CAM-30A |
|-------------|-------------------|------------|----------|----------|---------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.02/0.05g | 0.05g/0.1g | 0.1/0.2g | 0.2/0.5g | 0.5/1g |
| Display | LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 360 × 390 × 140mm | | | | |



JNS Series JNS系列电子计价秤

JNS Series Price Computing E-scale



功能参数 /FUNCTION SUMMARY

- 18 位 A/D 转换器 → 18 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 电瓶缺电自保护功能 → self-protection as power shortage
- 反应速度快且示值稳定 → fast reaction and stable display
- 找钱、累加和单价预设功能
→ with charge、accumulation and presetting unit price
- 数码显示 (LED) 充一次电正常可使用 30 天
→ LED model will stand 240 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 60 天
→ LCD model will stand 480 hours once on the normal operation condition



| Model | JNS-6A | JNS-15A | JNS-15U | JNS-30U |
|-------------|-------------------|---------|---------|---------|
| Capacity | 6kg | 15kg | 15kg | 30kg |
| Resolution | 1g | 2g | 5g | 5g |
| Display | LED LCD Display | | | |
| Voltage | AC220V | | DC6V4AH | |
| Packing Box | 370 × 330 × 140mm | | | |




ACS Series ACS系列电子计价秤

ACS Series Price Computing E-scale

功能参数 /FUNCTION SUMMARY

- 18 位 A/D 转换器 → 18 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 电瓶缺电自保护功能 → self-protection as power shortage
- 反应速度可调节功能 → optional reaction speed
- 找钱、累加和单价预设功能
→ with charge、accumulation and presetting unit price
- 数码显示 (LED) 充一次电正常可使用 30 天
→ LED model will stand 240 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 60 天
→ LCD model will stand 480 hours once on the normal operation condition

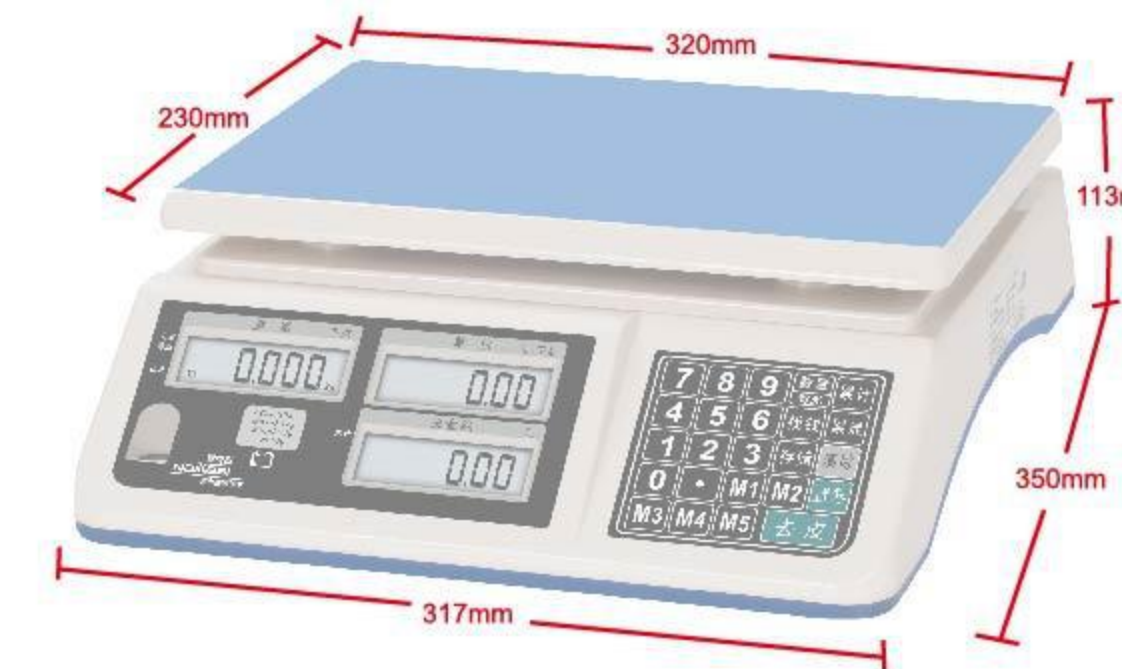

| Model | ACS-3A | ACS-6A | ACS-15A | ACS-15L | ACS-30A |
|-------------|-------------------|--------|---------|---------|---------|
| Capacity | 3kg | 6kg | 15kg | 15kg | 30kg |
| Resolution | 1g | 2g | 2g | 5g | 5g |
| Display | LED/LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |
| Packing Box | 360 × 390 × 140mm | | | | |

JNS Series



| Model | ACS-3L | ACS-6L | ACS-15L | ACS-30L |
|------------|-----------------|--------|---------|---------|
| | JNS-3L | JNS-6L | JNS-15L | JNS-30L |
| Capacity | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.5g | 1g | 2g | 5g |
| Display | LED/LCD Display | | | |
| Voltage | AC220V | | DC6V4AH | |

Pole Series 立杆系列电子计价秤

Pole Series Price Computing Pole E-scale

功能参数 /FUNCTION SUMMARY

- 21 位 A/D 转换器 → 21 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 电瓶缺电自保护功能 → self-protection as power shortage
- 反应速度可调节功能 → optional reaction speed
- 找钱、累加和单价预设功能
→ with charge, accumulation and presetting unit price
- 数码显示 (LED) 充一次电正常可使用 30 天
→ LED model will stand 240 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 60 天
→ LCD model will stand 480 hours once on the normal operation condition



ACS Series

NDC-A/TC-304 系列计数重打印秤

NDC-A/TC-304 Series Counting/Weighing Print Scale

功能参数 /FUNCTION SUMMARY

- 24 位 A/D 转换器 → 24 bit A/D converter
- 6 万分称重精度 → 60 thousand weighing precision
- 内置打印机, 可打印热敏标签纸、热敏连续纸
→ printer built-in, can print thermal label paper, or thermal continuous paper
- 打印内容根据需求可设
→ printed content can be set according to demand
- 保存 99 个商品信息 (PLU) → 99 PLUS data storage
- 可外接报警灯、PLC → external connection alarm、PLC
- 内置锂电池 → built-in lithium battery
- 具有计数、计重切换显示 → counting and weighing can switch
- 多级滤波可设 → multistage filter settable
- 支持多个传感器 → supporting multiple sensors
- 动物称重功能 → animal weighing function



| Model | NDC-1.5A | NDC-3A | NDC-6A | NDC-15A | NDC-30A |
|-----------------|--|--------|--------|---------|---------|
| Capacity | 1.5kg | 3kg | 6kg | 15kg | 30kg |
| Resolution | 0.05g | 0.1g | 0.2g | 0.5g | 1g |
| Tare | T=MAX | | | | |
| Overload Alarm | Max+9e | | | | |
| Accuracy | III | | | | |
| Voltage | NDC-A Battery 6V7AH TC-304 Battery 6V4AH | | | | |
| Work Temp | 0~40°C | | | | |
| Work Humidity | ≦ 85%RH | | | | |
| Print Head Life | ≧ 50km | | | | |
| Print Paper | Label: Width ≦ 55MM; Receipt: 50X57MM | | | | |

TEM 系列电子计重仪表

TEM Series Weighing Apparatus



- 具有单位选择和锁定功能 → with optional unit and lock function
- 可连接多支传感器 → connect multiple loadcell when you need
- 预设皮重、上下限报警功能 → preset the upper and lower limit alarm and the known tare
- 可选配 RS232 打印接口 → equipped with optional interface of RS232
- 可选配外接定量（上下限）报警灯或自动化称重设备功能 → optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment
- TEM-30E:30 万内码精度 → TEM-30E with 3 hundred thousand ISN precision
- TEM-60E:60 万内码精度 → TEM-60E with 6 hundred thousand ISN precision

TCM 系列电子计数仪表

TCM Series Counting Apparatus

- 预设皮重、上下限报警功能 → preset the upper and lower limit alarm and the known tare
- 自动再平均功能 → with automatic average in the course of counting
- 可选配 RS232 打印接口 → equipped with optional interface of RS232
- 可选配外接定量（上下限）报警灯或自动化称重设备功能 → optional function of linking external alarm lamps(upper and lower limits) or automatic dosing equipment
- TCM-30E:30 万内码精度 → TCM-30E with 3 hundred thousand ISN precision
- TCM-60E:60 万内码精度 → TCM-60E with 6 hundred thousand ISN precision



TAM 系列电子计价仪表

TAM Series Price Computing Apparatus

- 滤波强度可调 → with optional digital filtering strength
- 整机防水设计 → waterproof design
- 电瓶断电自保护功能 → self-protection as power shortage
- 找钱、累加和单价预设功能 → with charge、accumulation and presetting unit price
- 数码显示 (LED) 充一次电正常可使用 60 天 → LED model will stand 450 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 80 天 → LCD model will stand 650 hours once on the normal operation condition



TWH Series TWH系列电子计重台秤

TWH Series Weighing Bench E-scale



功能参数 /FUNCTION SUMMARY

- 21 位 A/D 转换器 → 21 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 20 万内码精度 → 2 hundred thousand ISN precision
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 简易计数功能 → simple counting
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶断电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能 → You can select non-backlight or auto-backlight by yourself
- 预扣重量和预设上下限报警功能 → preset the upper and lower limit alarm and the known tare

| Model | TWH-30 | TWH-60 | TWH-150 | TWH-300 | TWH-600 |
|------------|-----------------|--------|-------------|---------|-------------|
| Capacity | 30kg | 60kg | 150kg | 300kg | 600kg |
| Resolution | 1g/2g | 2g/5g | 5g/10g | 10g/20g | 20g/50g |
| Scale Size | 300 × 400mm | | 400 × 500mm | | 450 × 600mm |
| Display | LCD/LED Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |




TCH Series TCH系列电子计数台秤

TCH Series Counting Bench E-scale

功能参数 /FUNCTION SUMMARY

- 21 位 A/D 转换器 → 21 bit A/D converter
- 电阻应变式称重传感器 → resistance strain gauge sensor
- 20 万内码精度 → 2 hundred thousand ISN precision
- 可分辨 0.5d 单重 → resolution limit is 0.5d
- 多种单位选择 → manifold units
- 随意砝码校正 → calibrate at will
- 过载保护功能 → self-protection as overloading
- 反应速度可调功能 → optional reaction speed
- 电瓶缺电自保护功能 → self-protection as power shortage
- 无背光和自动背光可调功能
- ➔ You can select non-backlight or auto-backlight by yourself
- 动态检测和零点跟踪可调功能
- ➔ dynamic detection and optional zero tracking
- 预扣重量和预设上下限报警功能
- ➔ preset the upper and lower limit alarm and the known tare

| Model | TCH-30 | TCH-60 | TCH-150 | TCH-300 | TCH-600 |
|------------|-------------|--------|-------------|---------|-------------|
| Capacity | 30kg | 60kg | 150kg | 300kg | 600kg |
| Resolution | 1g/2g | 2g/5g | 5g/10g | 10g/20g | 20g/50g |
| Scale Size | 300 × 400mm | | 400 × 500mm | | 450 × 600mm |
| Display | LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |

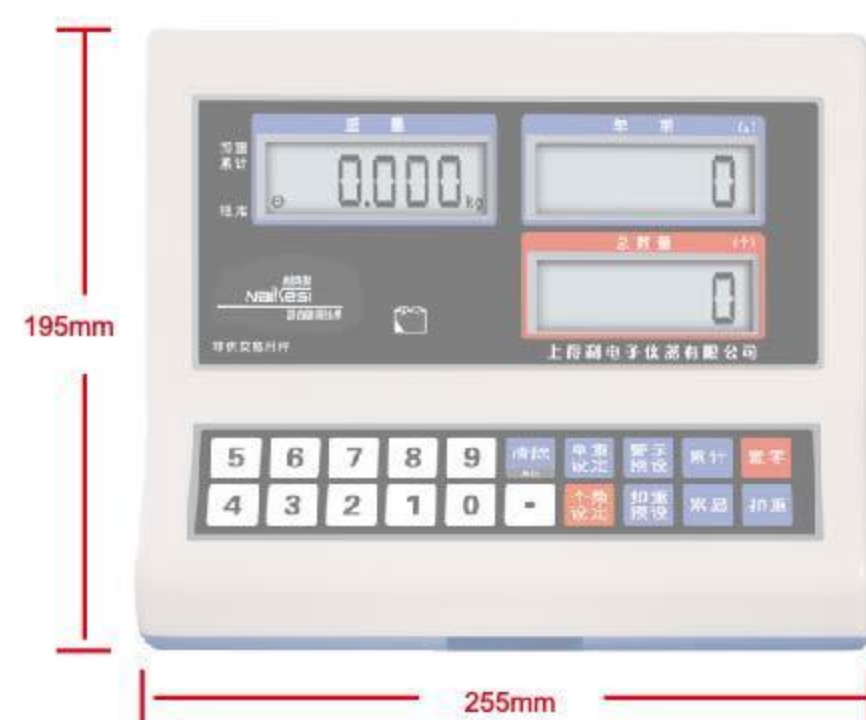

TAS Series TAS系列电子计价台秤

TAS Series Price Counting Bench E-scale

功能参数 /FUNCTION SUMMARY

- 18 位 A/D 转换器
- ➔ 18 bit A/D converter
- 电阻应变式称重传感器
- ➔ resistance strain gauge sensor
- 电瓶缺电自保护功能
- ➔ self-protection as power shortage
- 反应速度可调节功能
- ➔ optional reaction speed
- 找钱、累加功能
- ➔ with charge and accumulation
- 数码显示 (LED) 充一次电正常可使用 30 天
- ➔ LED model will stand 240 hours once on the normal operation condition
- 液晶显示 (LCD) 充一次电正常可使用 60 天
- ➔ LCD model will stand 480 hours once on the normal operation condition

| Model | TAS-60 | TAS-100 | TAS-160 | TCH-300 | TCH-600 |
|------------|-----------------|---------|-------------|---------|-------------|
| Capacity | 60kg | 100kg | 160kg | 300kg | 600kg |
| Resolution | 10g | 20g | 20/50g | 50g | 100g |
| Scale Size | 300 × 400mm | | 400 × 500mm | | 450 × 600mm |
| Display | LED/LCD Display | | | | |
| Voltage | AC220V | | DC6V4AH | | |

